

PROMO

REVOLUTION



AFTER MARKET AUTO



AFTER MARKET
MARINE



CONTRACT



HEALTHCARE



TRUCKING

APPLICATIONS


PROMO Revolution

From steering wheels to door trims, our designs enable the automotive interior industry to choose materials for next generation.

Promo Rev strive for a cleaner and more sustainable design, with appealing, long-lasting materials for automotive interior surfaces.



KEY CHARACTERISTICS

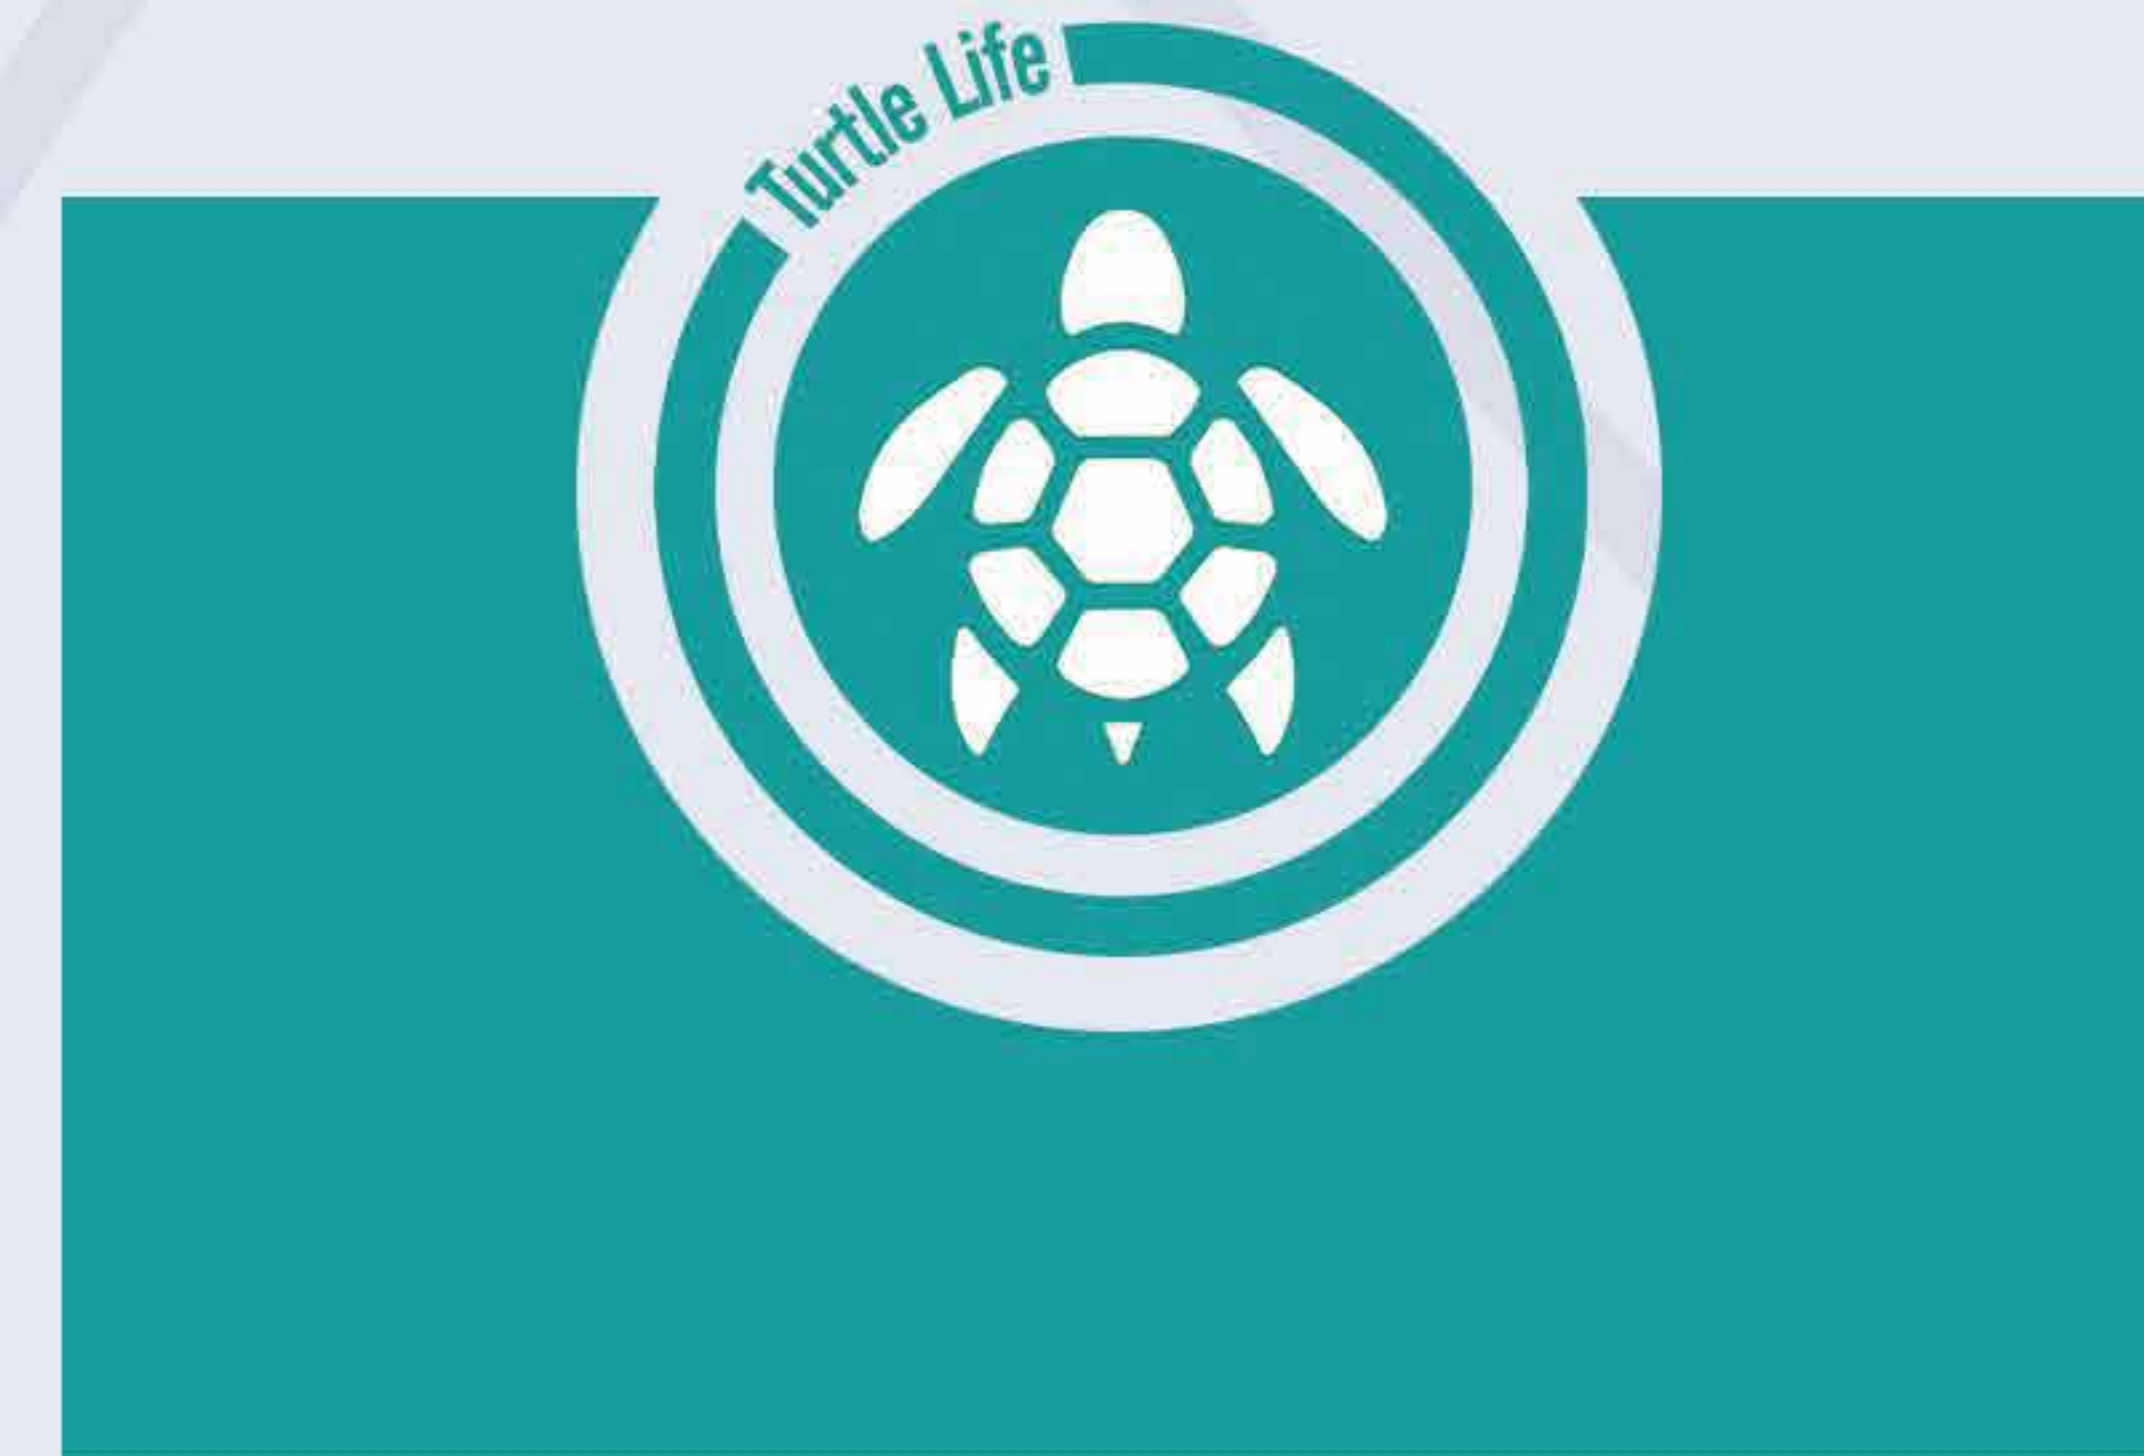

ANTI FLAMMABLE



ABRASION



COLD CRACK RESISTANCE







FLAMESAFE

A low EMISSION product

Anti-Flammable

Promo Revolution passes the Flammability test which is used to determine the burn resistance capabilities of materials used in the occupant compartments of motor vehicles. This test is typically performed on materials in passenger cars. The purpose of this The standard test is to reduce the deaths and injuries to motor vehicle occupants caused by vehicle fires.

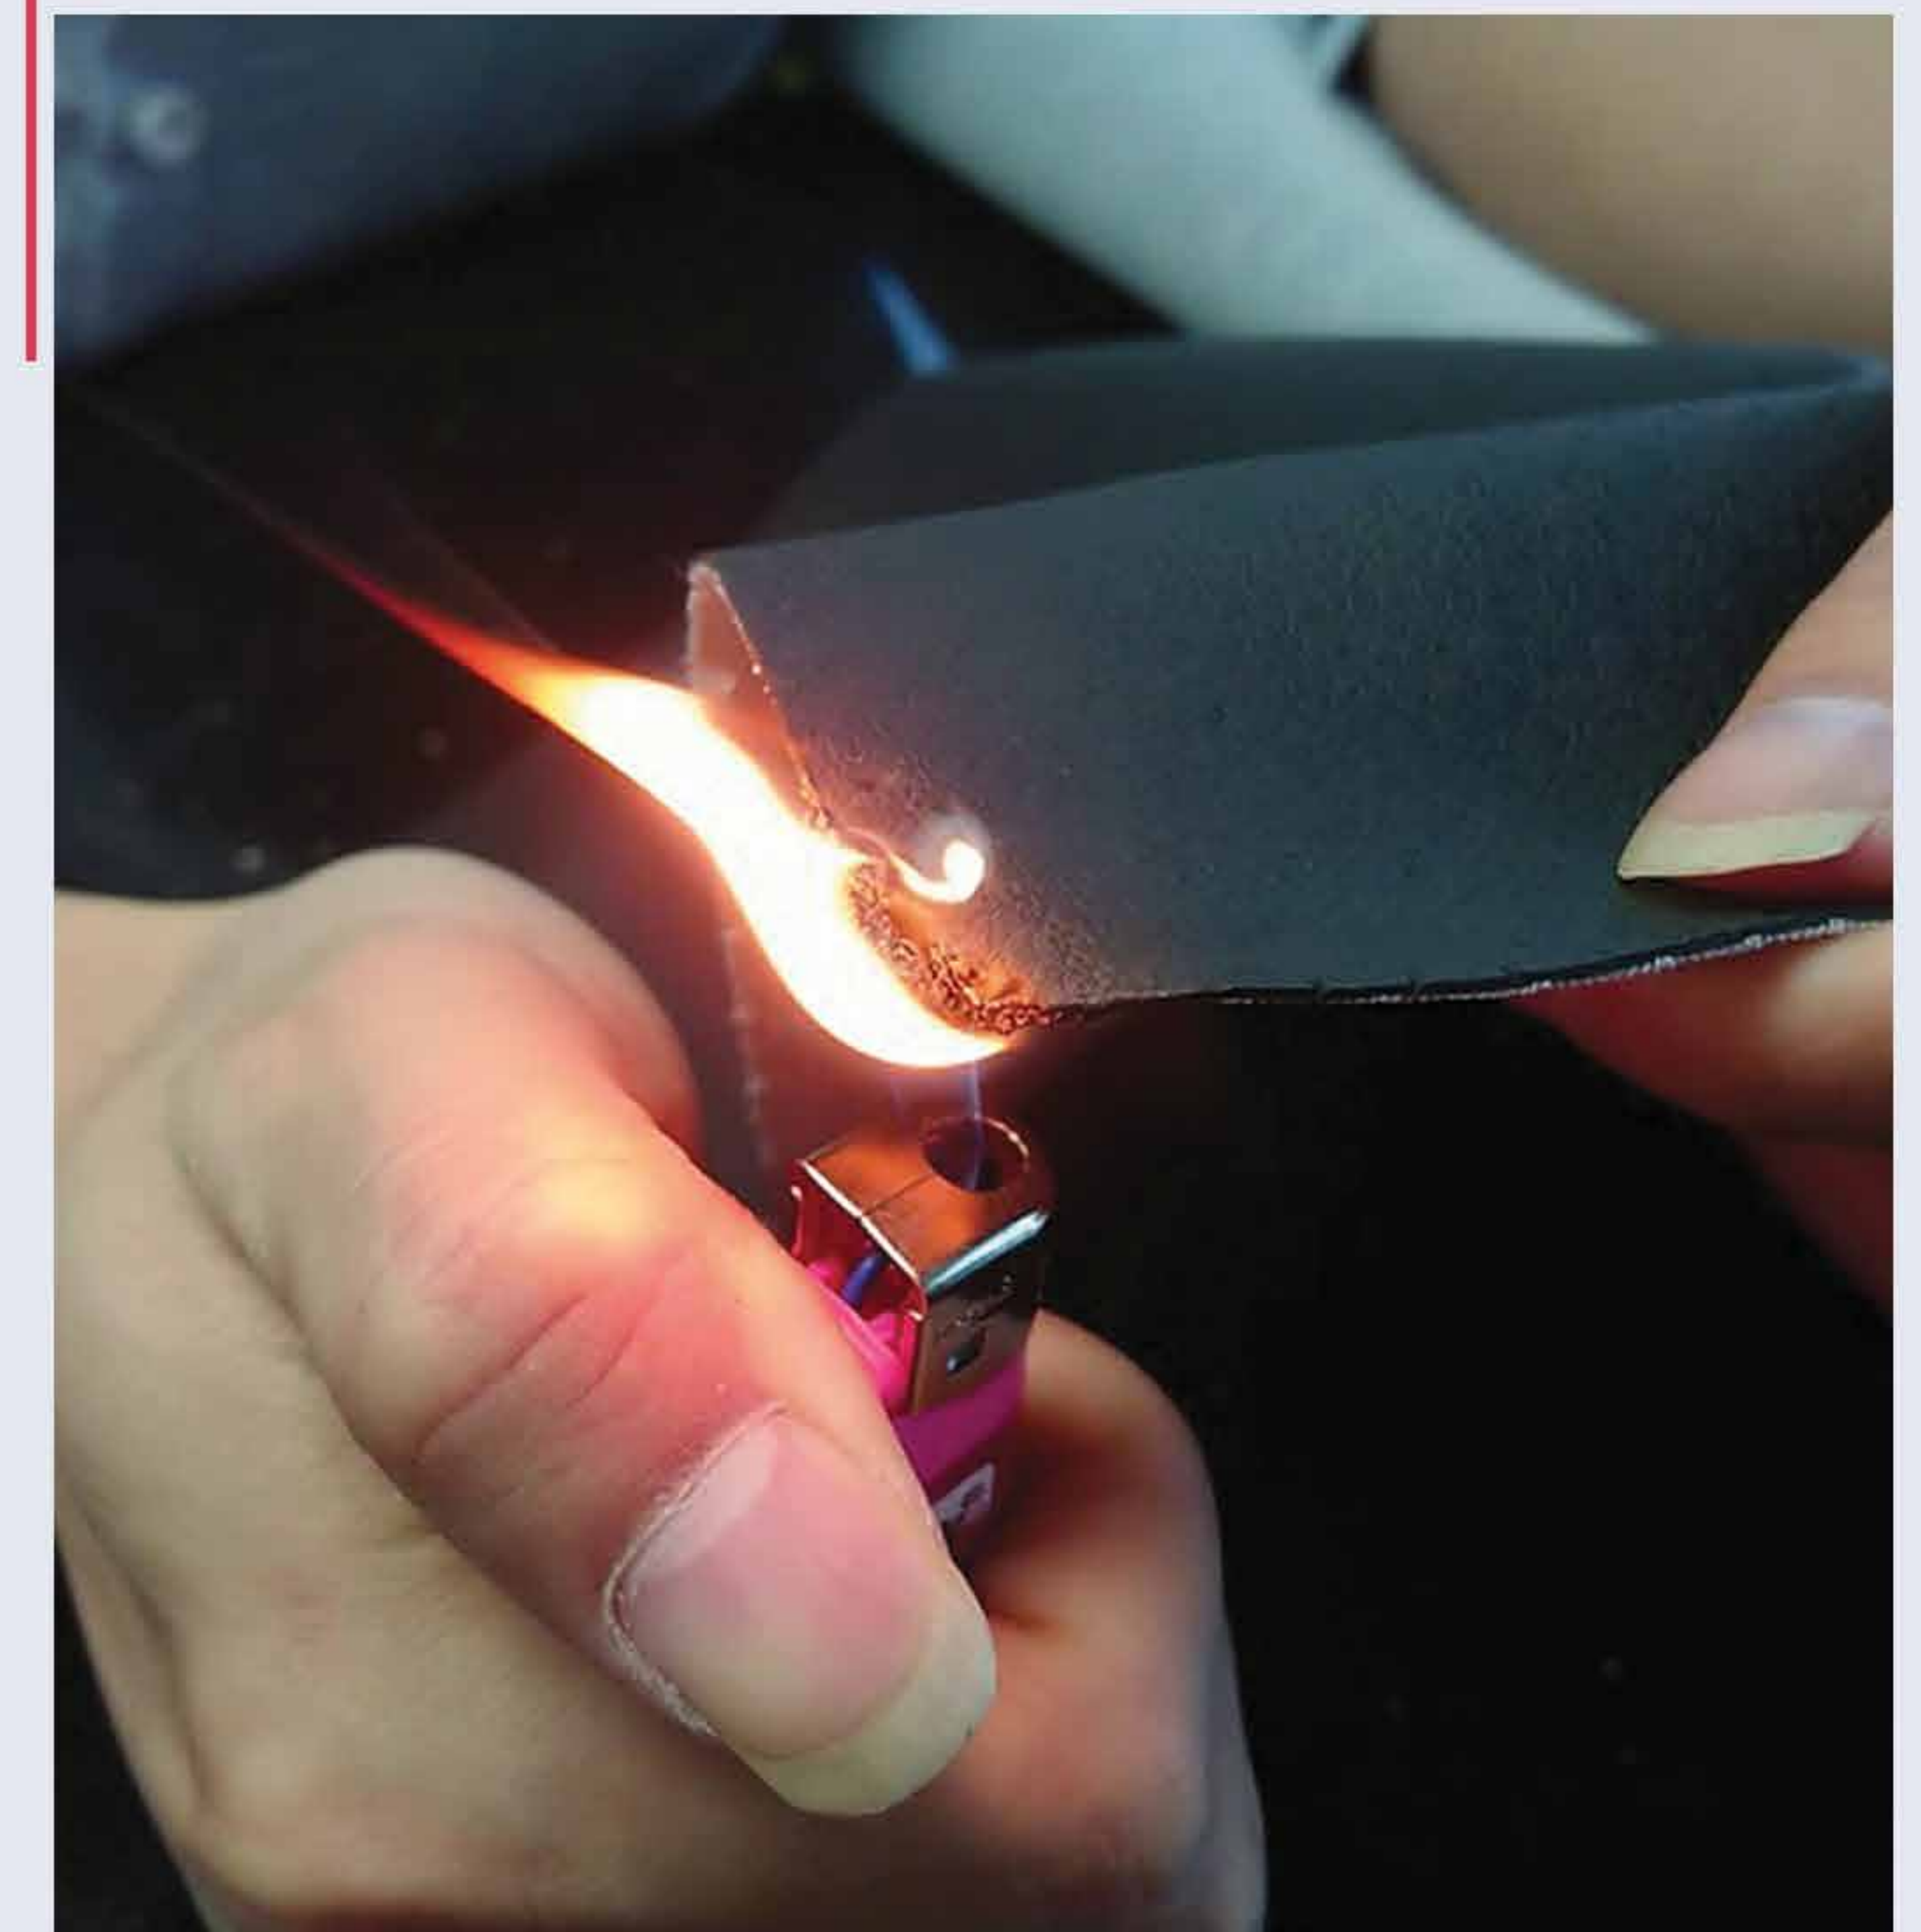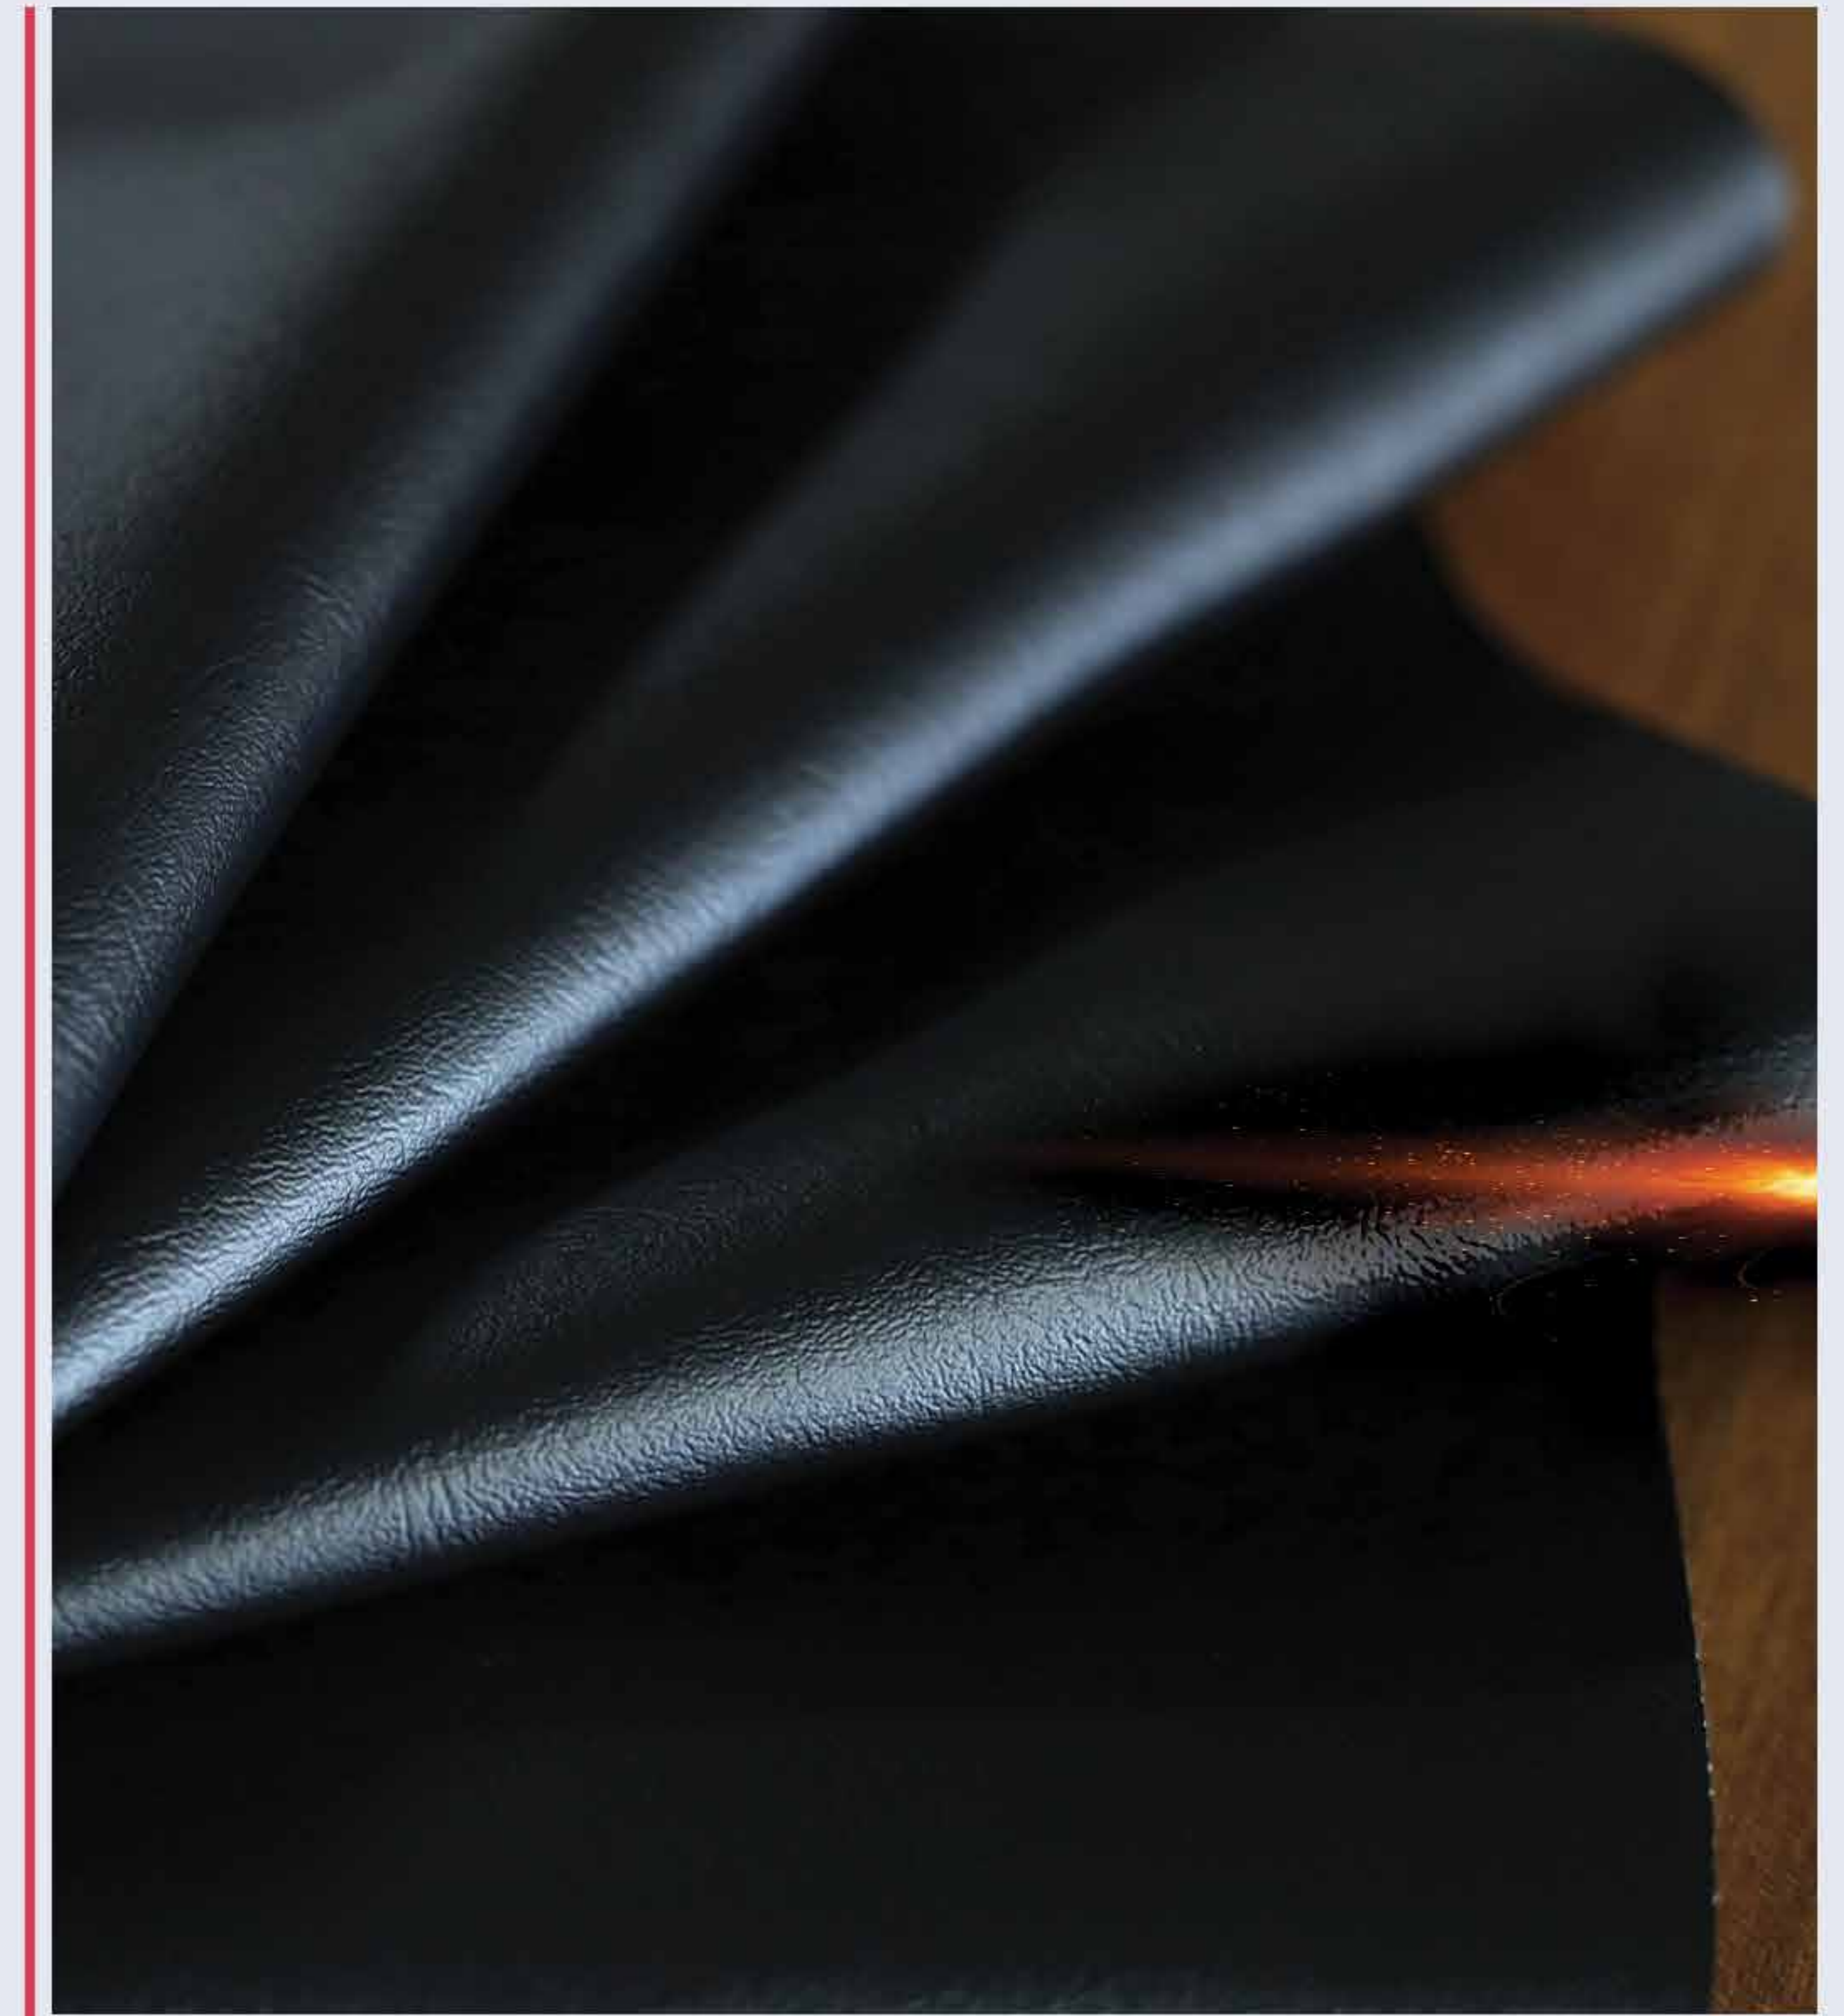



TURTLE LIFE

A LONGEVITY PRODUCT

Cold Crack Resistance

Promo Revolution passes the requirement of the cold-crack resistance and is an excellent material with no cracks.




Abrasion

Depicts resistance power against damage due to abrasion.
ASTM D4157
20,000 rubs




COLOR PALETTE

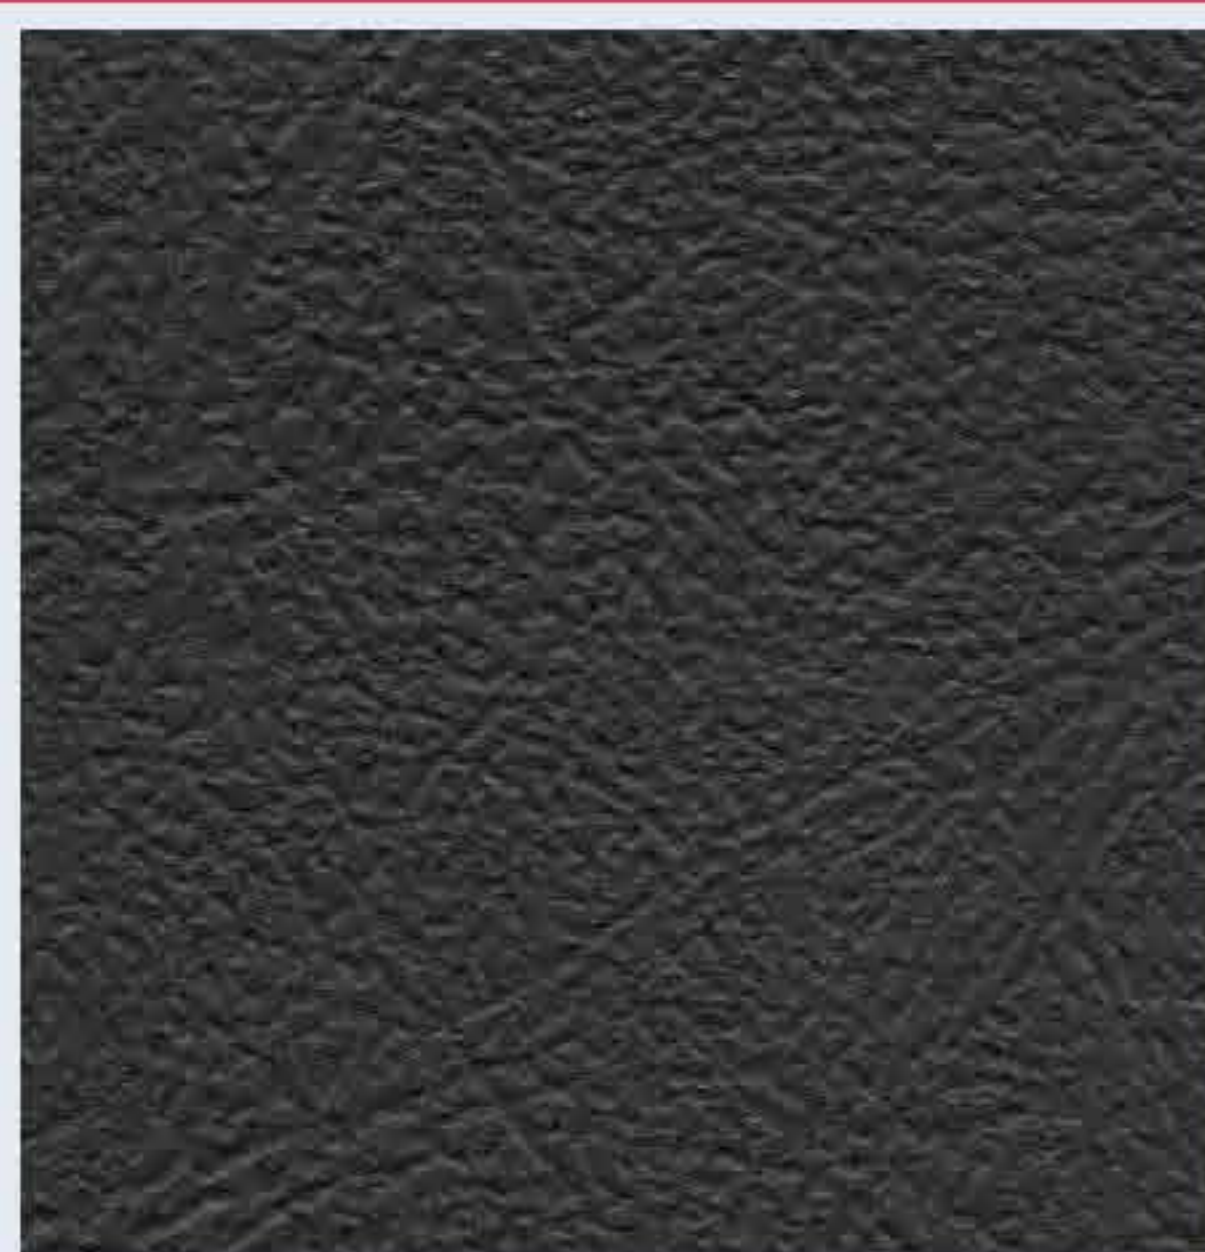

SIERRA Black PN: PRX-958



CORINTHIAN Black
PN: PRX-3722

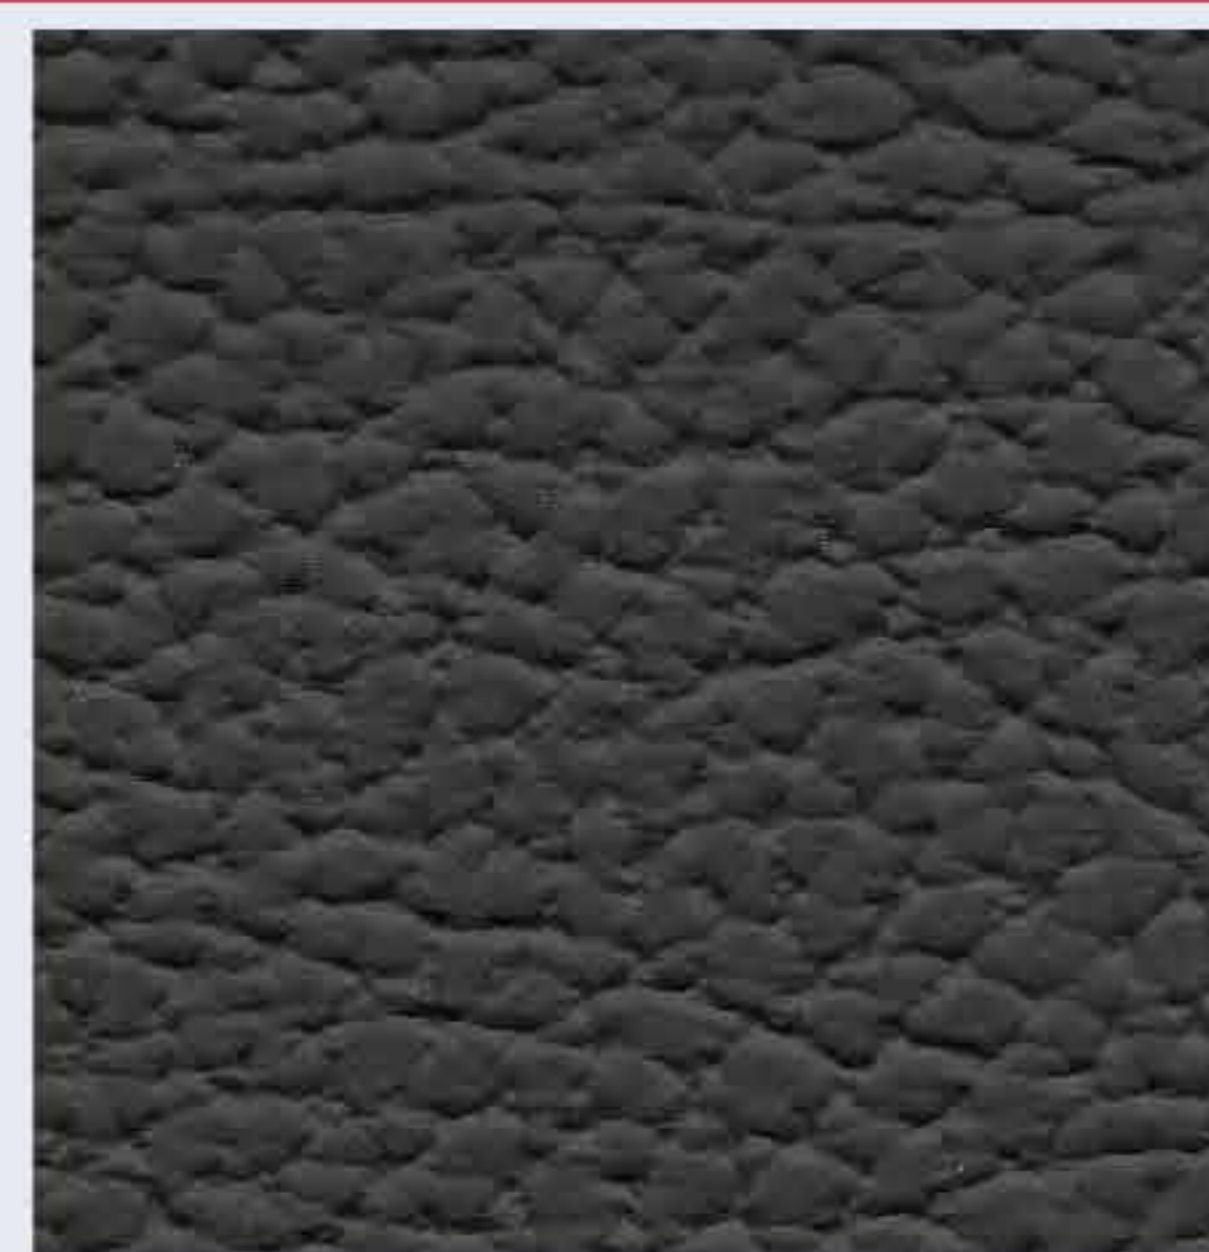


VERONA CHAR Black
PN: PRX-7482




Milled Pebble Black
PN: PRX-7397




G-GRAIN Black
PN: PRX-7227

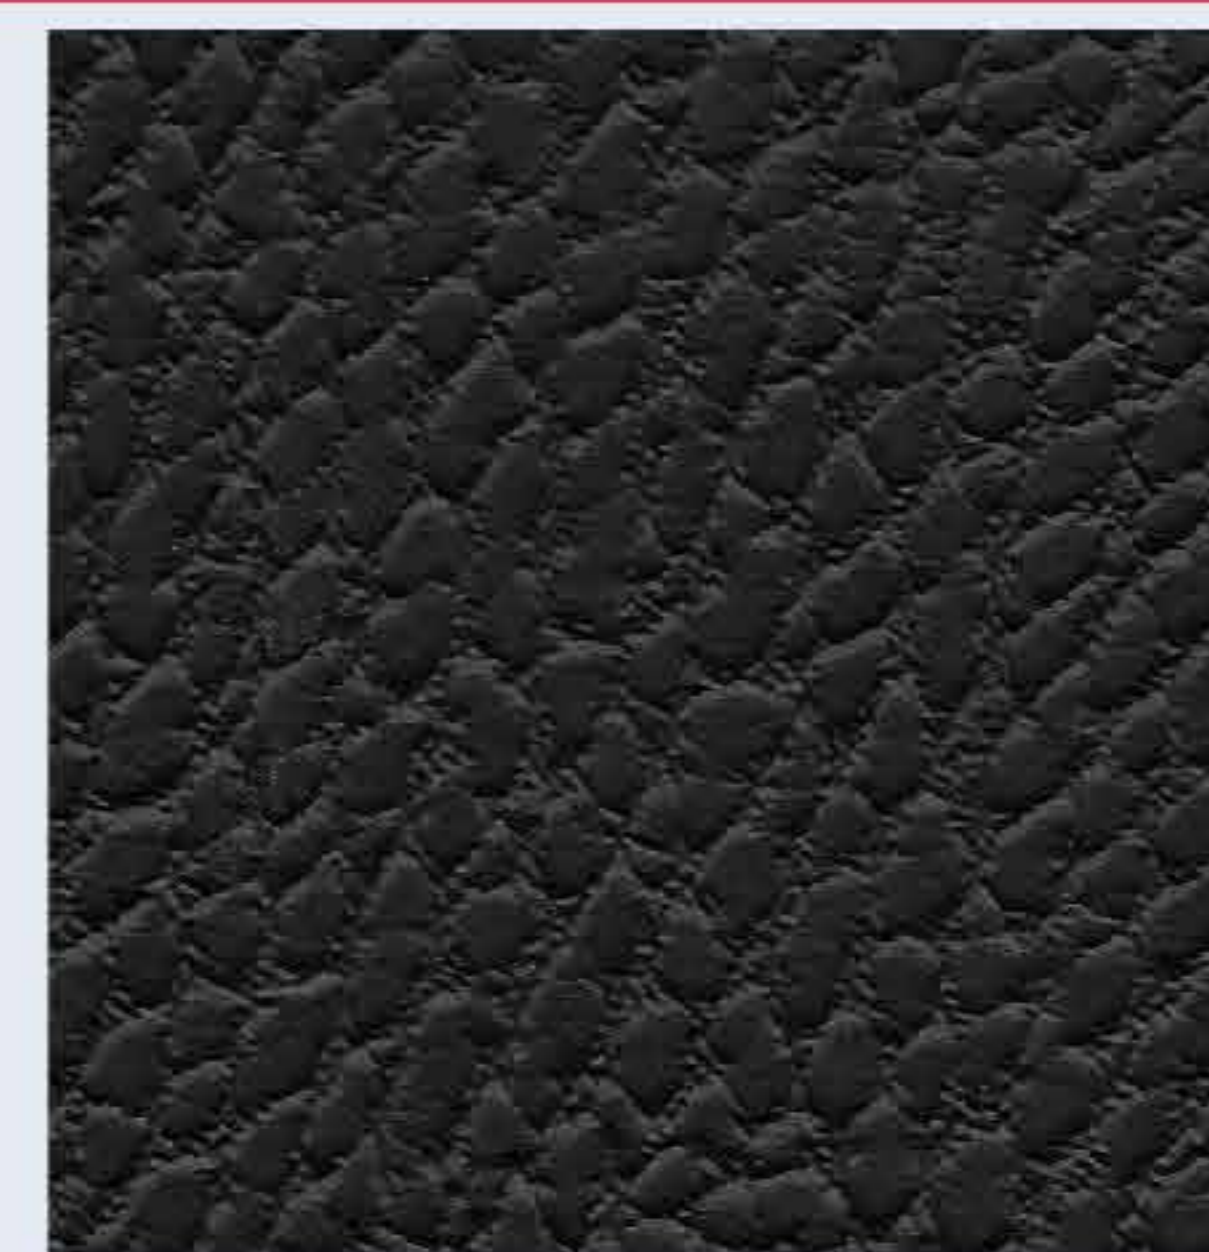


CHROMA Black
PN: PRX-5200

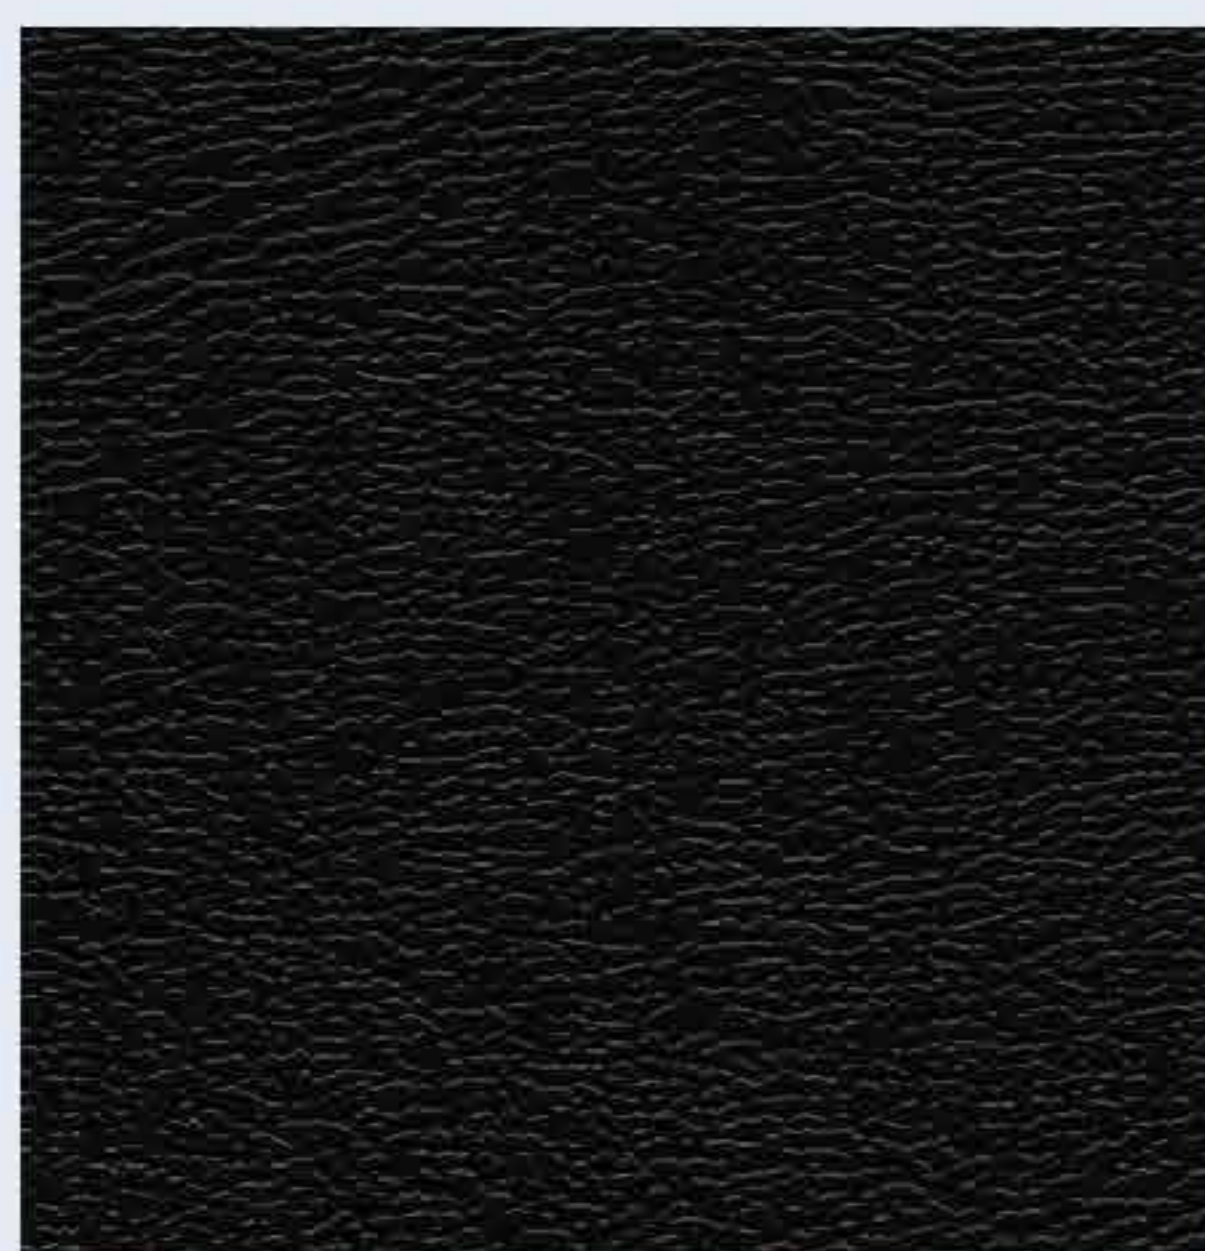

Wallaby Black
PN: PRX-5004

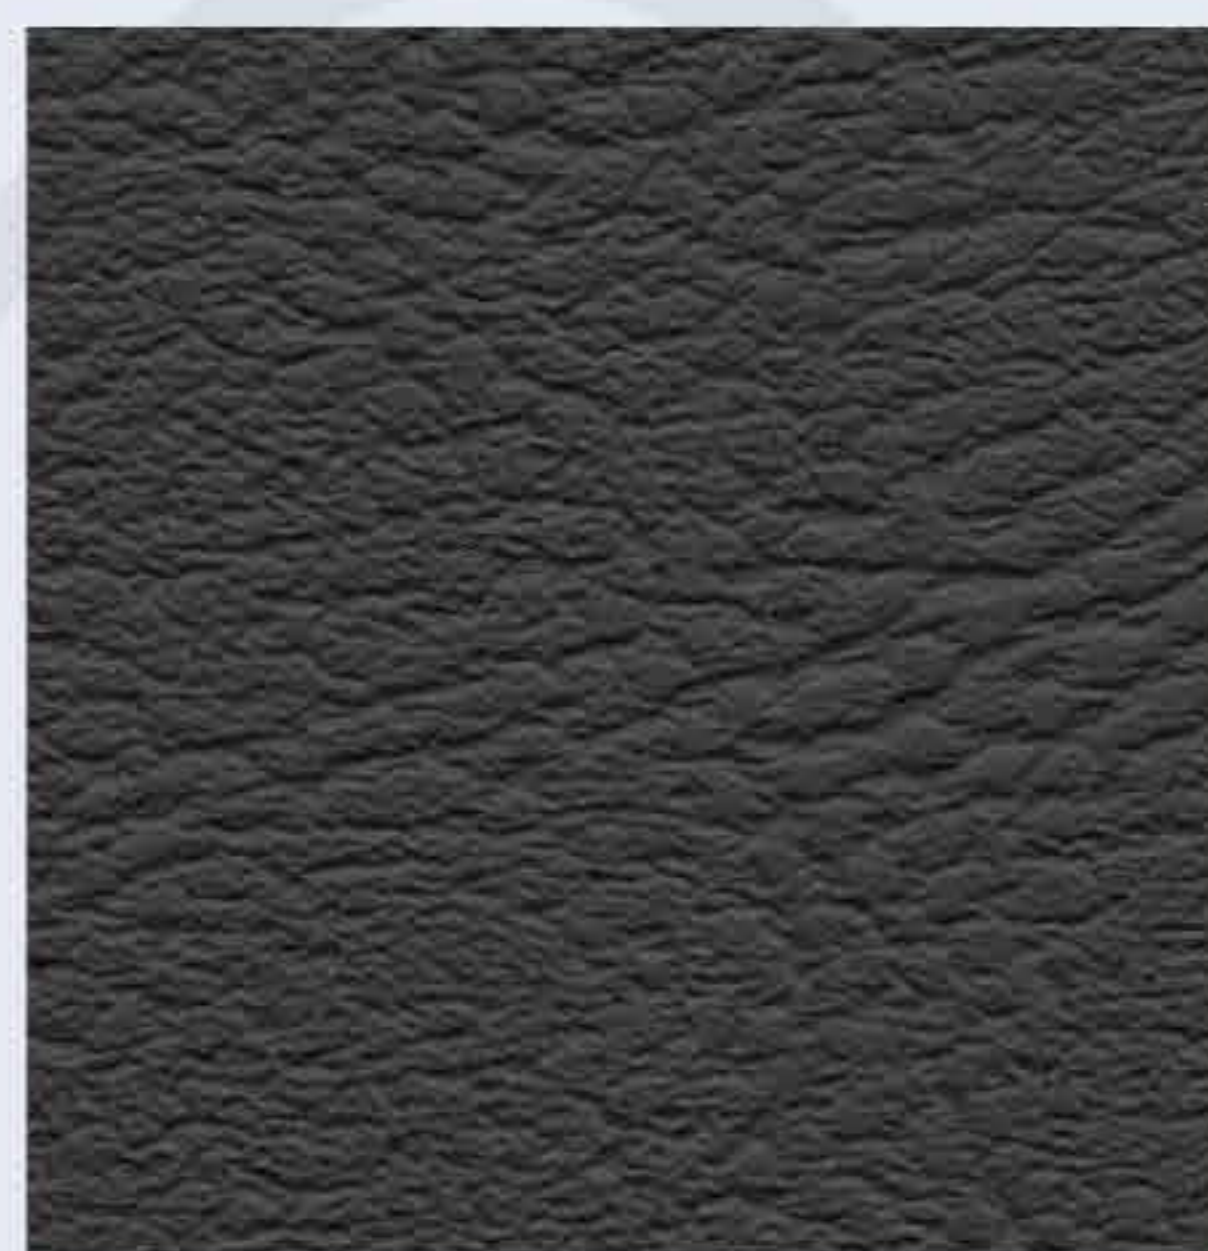

MADRIS Black
PN: PRX-2295

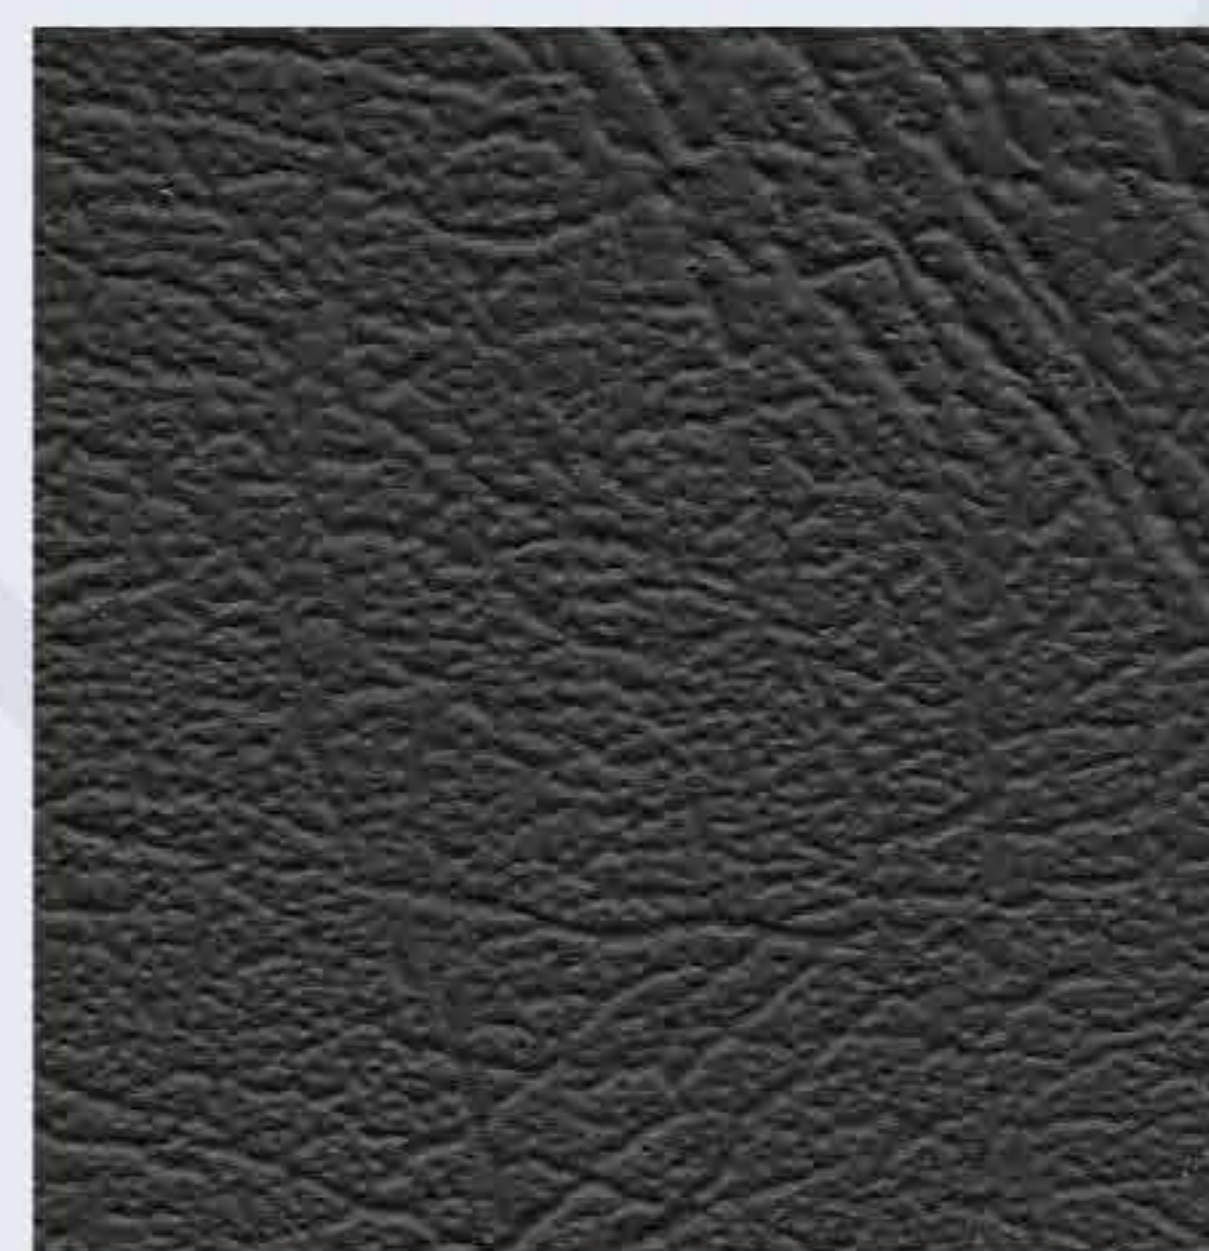

OXEN Black PN: PRX-4560



COVENTRY Black
PN: PRX-5000




MONTICELLO Med NEUTRAL
PN: PRX-7043



MONTICELLO SHALE
PN: PRX-7323




MONTICELLO Med GRAY
PN: PRX-6890

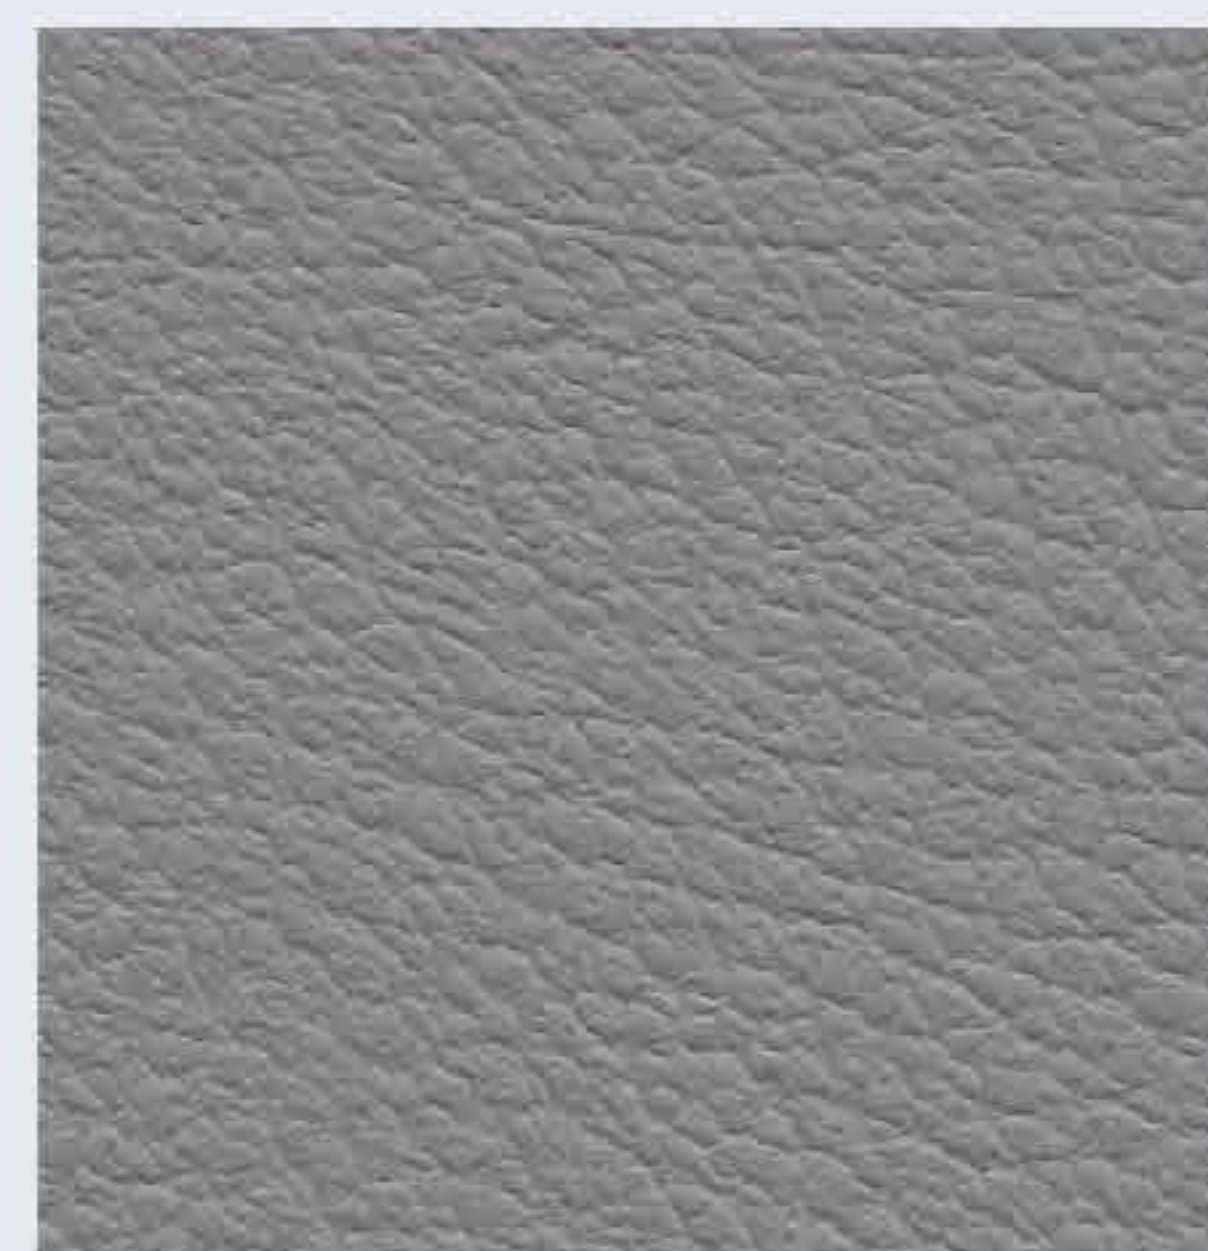

G-GRAIN Med GRAY
PN: PRX-7114



MONTICELLO Med PEWTER
PN: PRX-7179

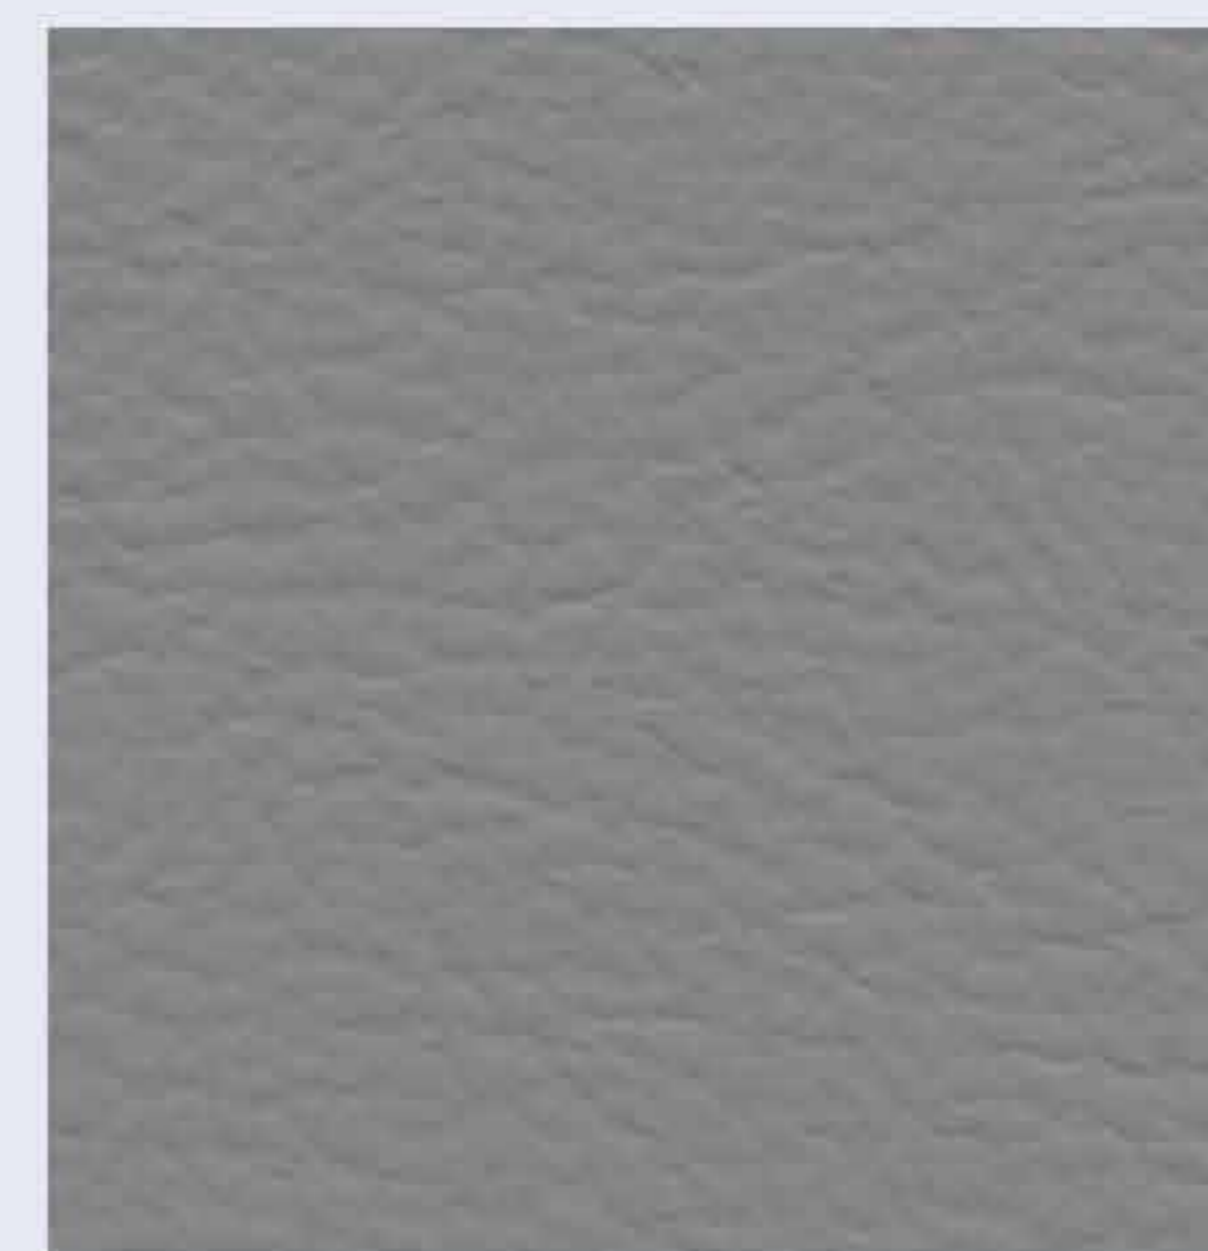


Milled Pebble Med FLINT
PN: PRX-7444



MONTICELLO V. DK PEWTER
PN: PRX-7346



PROMO REVOLUTION MATERIAL SPECIFICATION

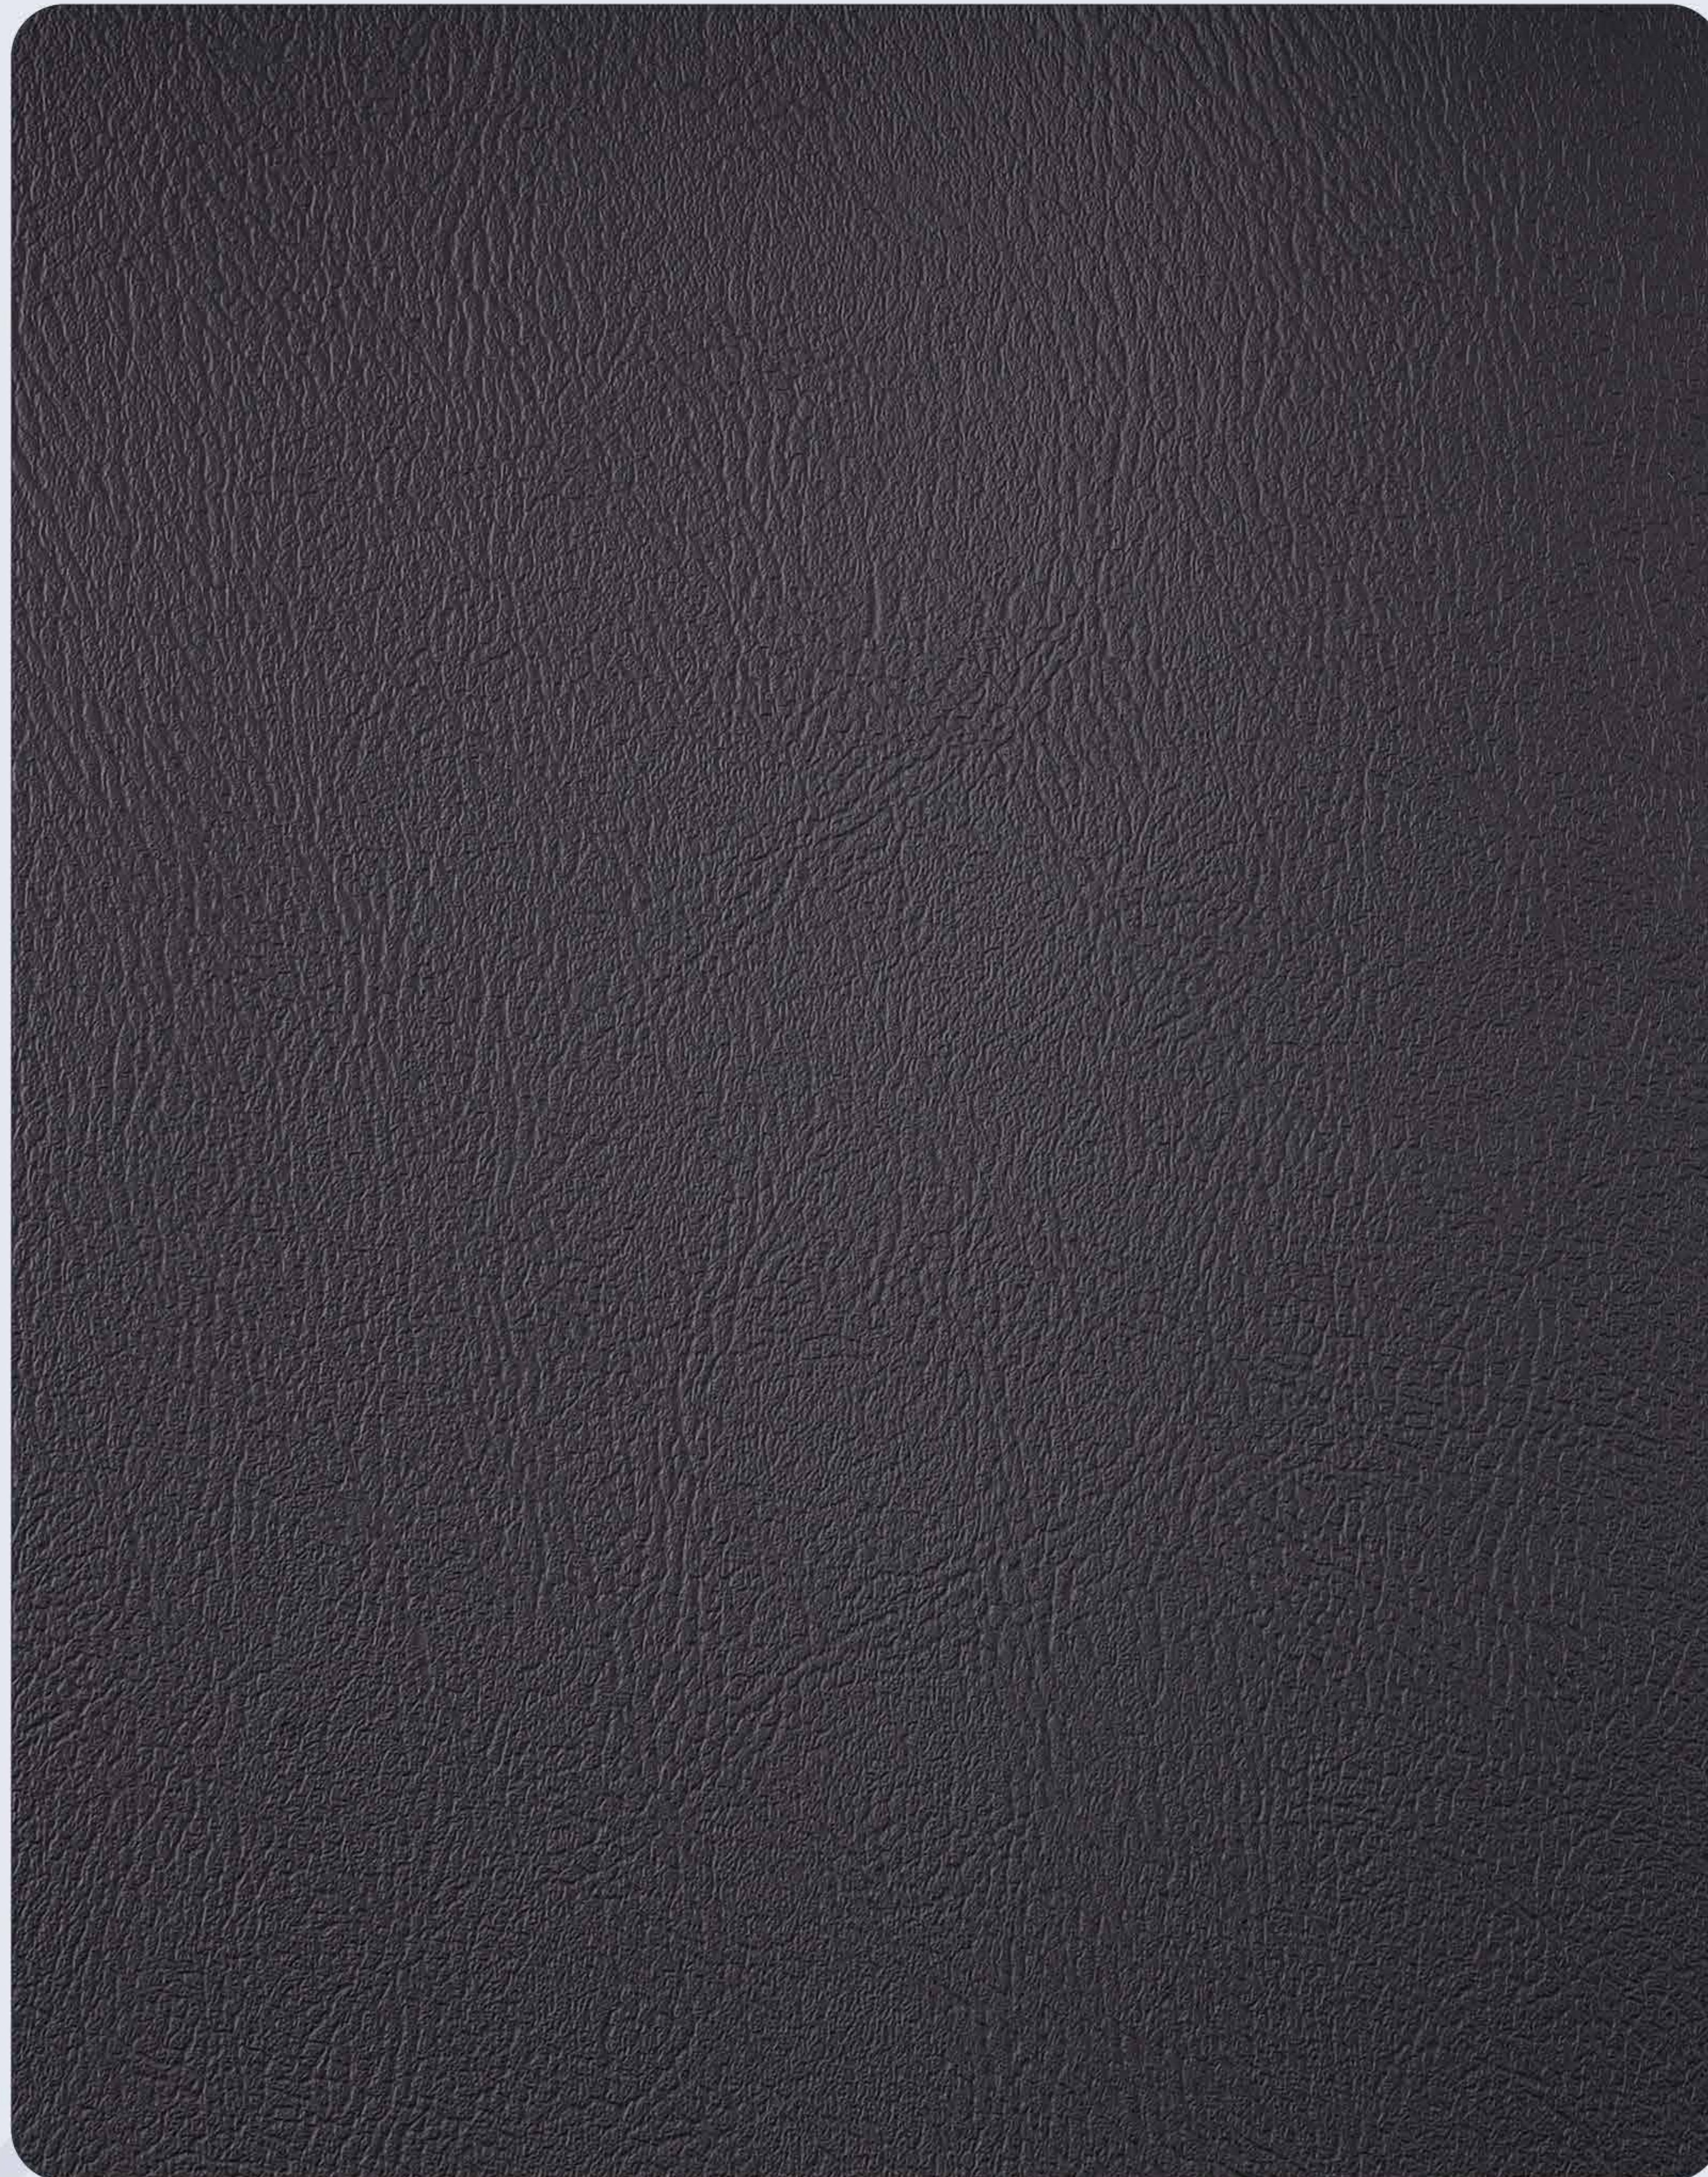

TESTS	TESTS METHOD	TEST SPECIFICATIONS
Total Weight (Oz/ Lin.Yd)	ASTM D751	30 +/- 10%
Thickness (mm)	ASTM D751	0.90 +/-10%
Grab Tensile Strength (Lbf)		
Warp	ASTM D751	80 Min.
Weft	ASTM D751	80 Min.
Tongue Tear Strength (Lbf)		
Warp	ASTM D751	6.0 Min.
Weft	ASTM D751	4.5 Min.
Flammability mm/minute	FMVSS 302	100 MAX.
Flammability	TB 117-2013	Passs the requirement
Cold Crack Resistance at -10°F	FTMS 191-5874	No crack
Wyzenbeek abrasion (#10 cotton duck cloth)	ASTM D4157	20000 cycles-Pass
Width Inches		54
Roll Length Yards		25

PROMO



USA : Futura Textiles 8709 Caroma St., Olive Branch, MS 38654
Tel.: (877) 426-8177, Fax: (662) 932-8934

E-mail: office@futatertextiles.com